

Loox

HÄFELE




LED 2030


833.73.480 833.73.482  
833.73.481 833.73.520




| 12 V<br>System | K      | W       | T <sub>A</sub>                    |  mm |  mm |  |
|----------------|--------|---------|-----------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 833.73.480     | 2700 K | 4.8 W/m | -20 °C – +35 °C<br>-4 °F – +95 °F | 5000 x 8 x 2.15                                                                      | 5010 x 18 x 12.15                                                                      | Loox<br>12 V                                                                        |
| 833.73.481     | 3000 K |         |                                   |                                                                                      |                                                                                        |                                                                                     |
| 833.73.482     | 4000 K |         |                                   |                                                                                      |                                                                                        |                                                                                     |
| 833.73.520     | 5000 K |         |                                   |                                                                                      |                                                                                        |                                                                                     |

732.28.390

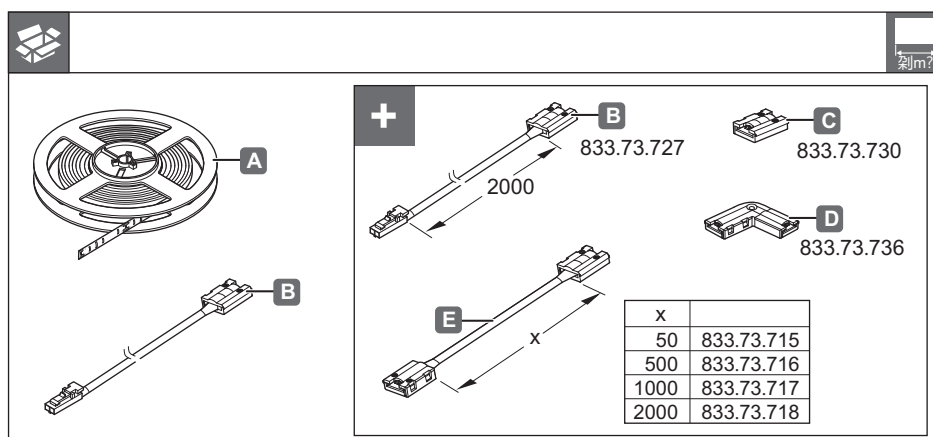


HDE KE2

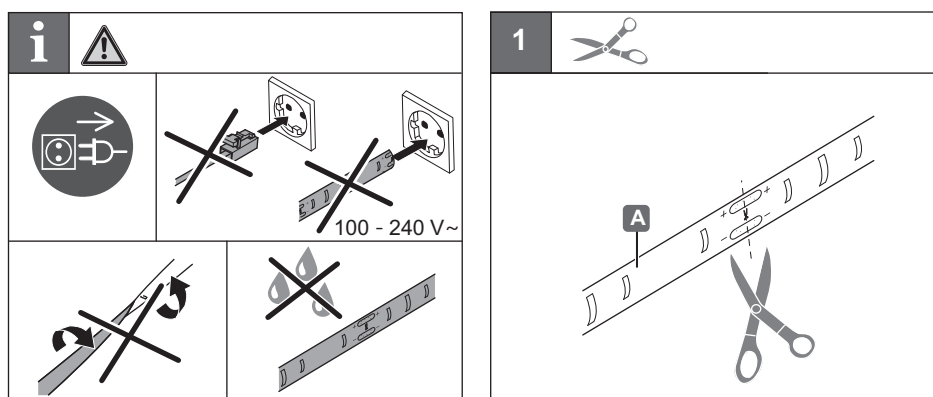

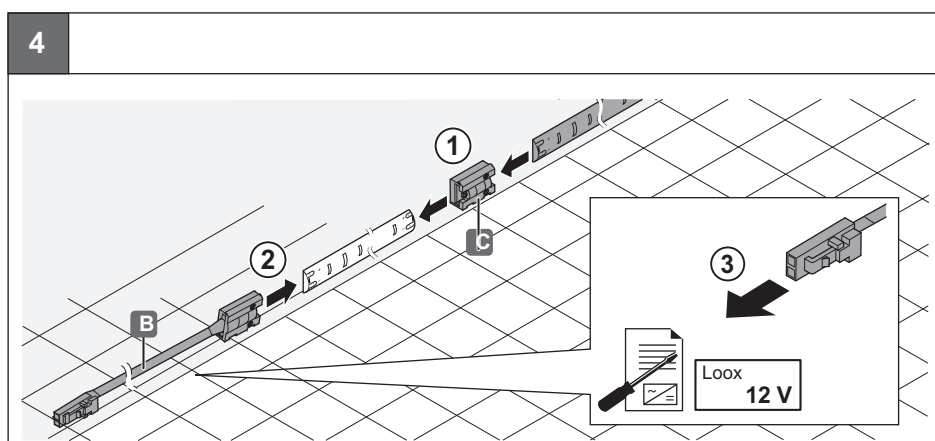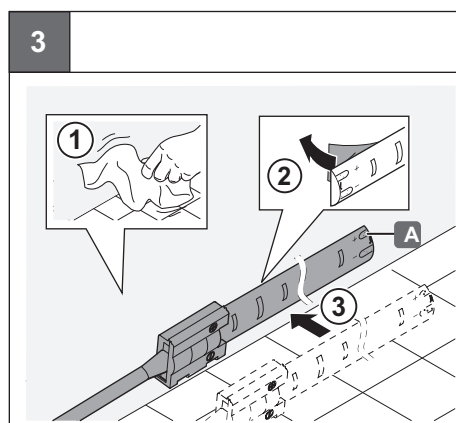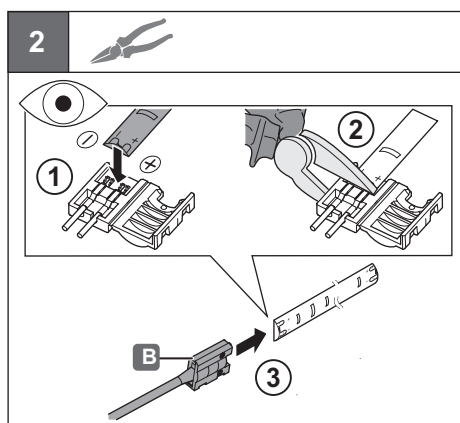

732.28.390

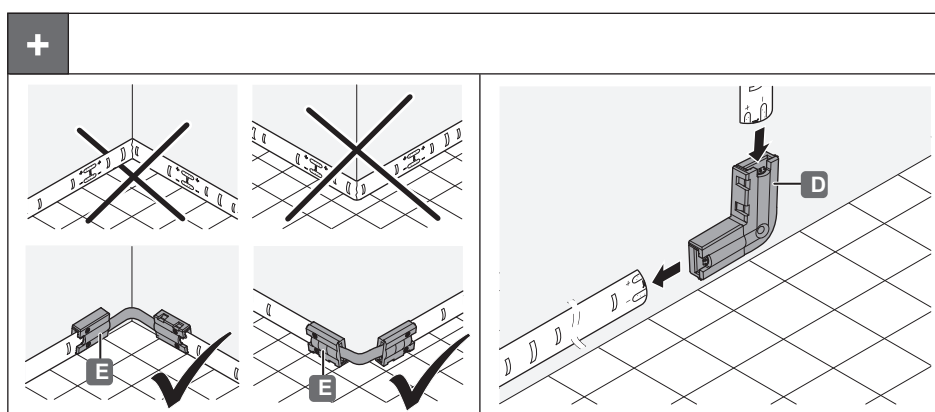

HDE KE2