

niGLON

Circuit Protection




DRT20

Mechanical Stair Timer

30 Sec - 20 Min


Wiring Diagram

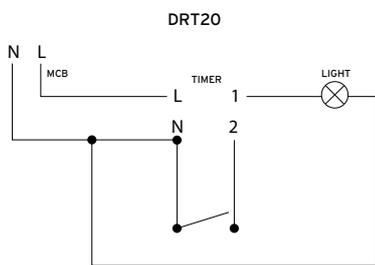

The DRT20 is a variable delay timer to control stairwell lighting.

A momentary action push button will initiate the DHC18 output, which will then 'time-out' after a pre-set delay has elapsed.

Technical Drawing

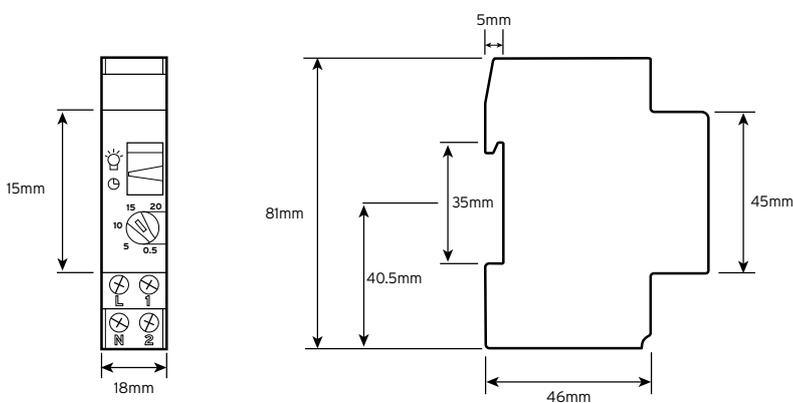

Technical Specifications

AC Switching Capacity	16A 250v AC Resistive Load 10A 250v AC Inductive Load cos Φ 0.6 2300W Incandescent Lamp Load
Adjustment Range	05 min - 20min
Contact Type	Normally Open
Delay Type	Delay to off
Ambient Temperature	-10°C to 55°C
Ambient Humidity	45~85% RH
Weight	Approx. 75g
Volt Free Contact	No
LED Lamp Load	< 2W = 20W Max 2 - 8W = 55W Max > 8W = 70W Max
Protection Type	IP20
Dimensions	85mm H x 18mm W x 65Dmm

