



	DUAL RCD (TYPE A)					
NUMBER OF USABLE WAYS		7	11		17	
PART NUMBER		F2007DA	F2011DA		F2017DA	
GTIN-13		5060523524266	5060523524273		5060523524280	
INNER CARTON QUANTITY		1	1		1	
OUTER CARTON QUANTITY		4	4		4	
DIMENSION DRAWING		14P	18P		24P	
WEIGHT (1PC) Kg		4.7	4.75		5.2	
DIMENSIONS (HxWxD)mm		259x306x113	259x378x113		259x486x113	
RCD (TYPE A)		2x 80A 30mA	2x 80A 30mA		2x 80A 30mA	
DOUBLE BANK		N	N		N	
TAIL CLAMP COMPATIBLE (ACCF)		Y	Y		Y	
STANDARD		EN 61439-3				
RATED VOLTAGE (Un/AC)		230V				
FREQUENCY (Hz)		50/60				
PROTECTION DEGREE (IP)		2XC				
MAXIMUM TERMINAL BAR CAPACITY		16mm ²				
TERMINAL BAR TIGHTENING TORQUE (Nm)		2.0				
MOUNTING		35mm DIN RAIL				
MATERIAL		1mm ELECTRO GALVANISED STEEL (ZINC)				
FINISH		RAL 9001 POWDER COATED SMOOTH FINISH				
KNOCKOUTS		SELECTION 20mm - 40mm				
ACCESSORY PACK		CIRCUIT IDENTIFICATION LABELS / GROMMET STRIP				
ORIGIN OF MANUFACTURE		CHINA				



DIMENSIONS

14P

18P

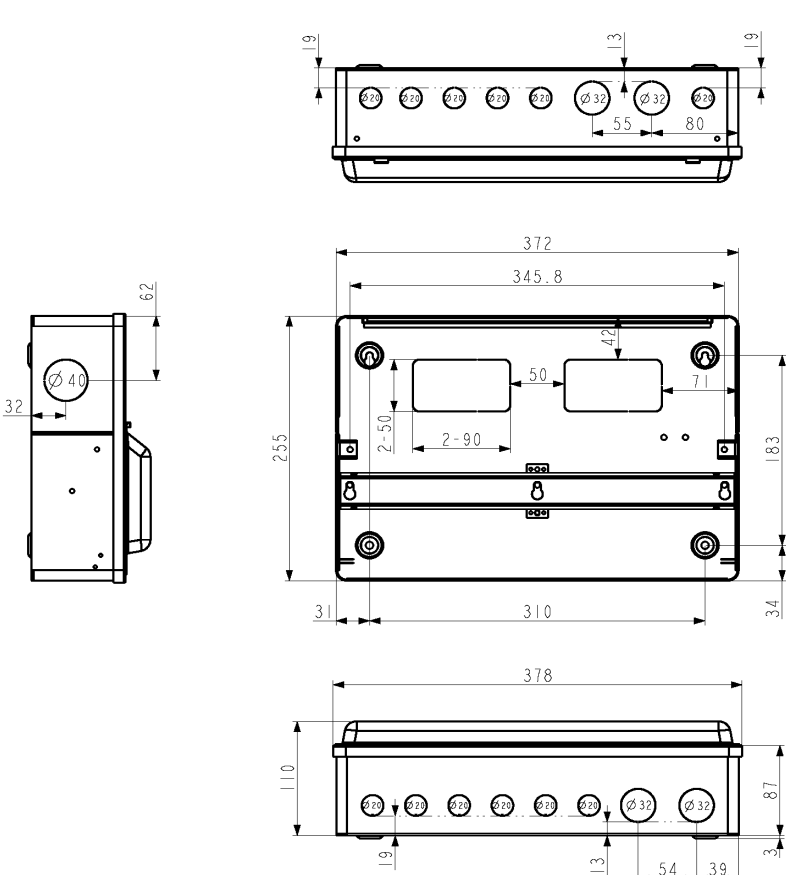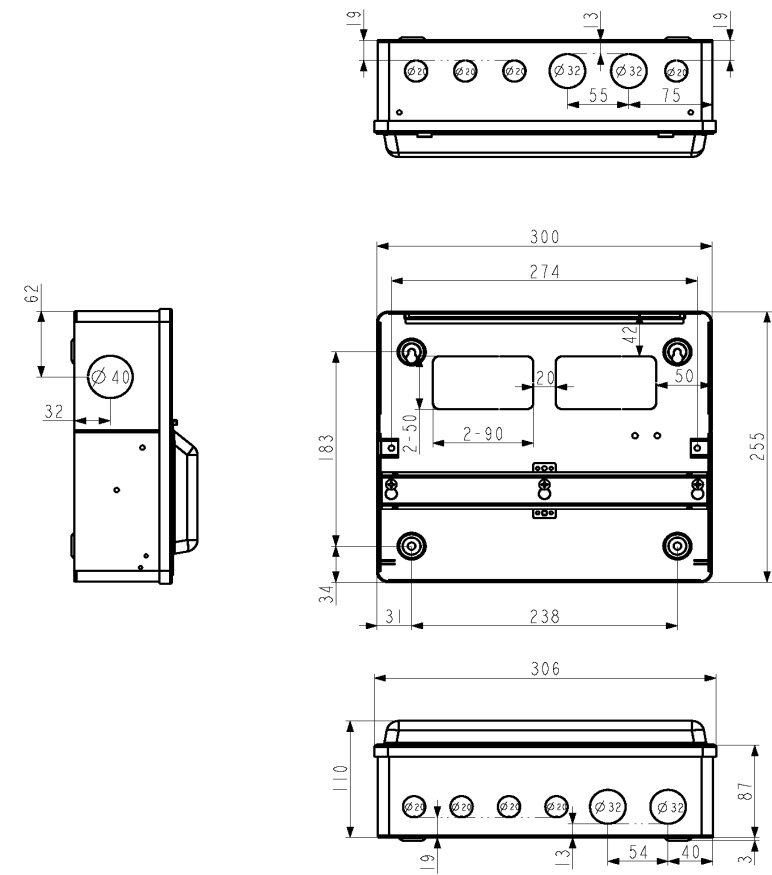

24P

