


Wiring

Having correctly identified the wiring from your existing light fitting, pull the mains wire through the conduit and connect to the terminal block in the following way:

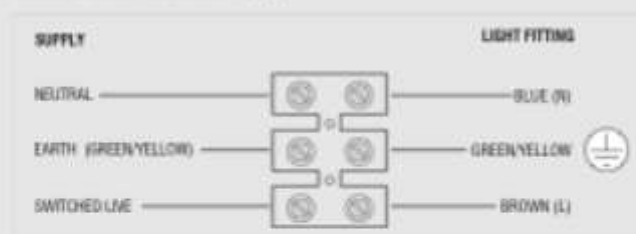

Check that...

You have correctly identified the wires.
The connections are tight.
No loose strands have been left out of the connection block.

Fitting/Replacing the bulb: Max. 60W E27 GLS

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully and responsibly. Use a soft cloth to handle bulbs, avoid directly touching the bulbs as this will shorten their life. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.

Max. 60W E27



Technical data

Supply Voltage:	220-240V~, 50Hz	Bulb Type:	1 x Max. 60W E27 GLS (required)
-----------------	-----------------	------------	---------------------------------



Conformity with all relevant UKCA Directive requirements.



Conformity with all relevant EC Directive requirements.



This is a Class 1 product and must be earthed.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.



This product is rated at IP65



This product is not suitable for dimming.

Care and Safety

Allow 10 minutes to cool before replacing, adjusting or cleaning.

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.

For your safety, always switch off the power supply before changing lightbulbs, or cleaning.



Replace Cracked Shade

The bulb source is protected by the shade. The shade must be replaced immediately should it become cracked or damaged. This fitting must not be used without the shade in place.

Instruction manual

Zone Bollard

13822



80775 Root Kit