

### PANEL HEATERS COMPACT FAN HEATERS CH350




Fan assisted heater for the control of moisture in a control panel. The aluminium profile provides a stable release of heat. Quick connect terminals aid installation. Din rail mounting

#### Technical Drawing

#### General Characteristics

Heat output	250W
Rated voltage	230V AC 50/60 Hz
Width	85mm
Height	222mm
Depth	85mm
Air flow @ 50Hz	45m <sup>3</sup> / h
Construction material	Aluminium
Heating element	Ni - Cr wire
Connection type	Quick Connect
Terminal Capacity	2.5mm <sup>2</sup>
Operating/Storage temperature	-45° to +70° C
Ingress protection	IP20
Weight	1.4Kg

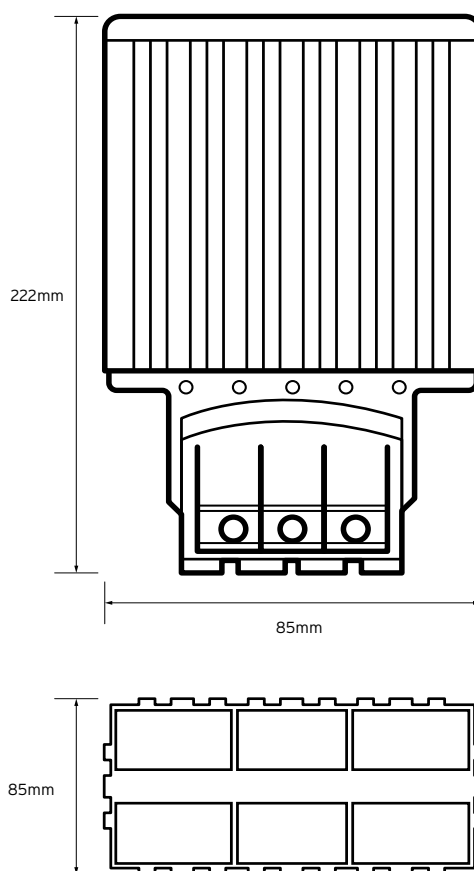

#### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.