

PANEL COMPONENTS

PANEL THERMOSTAT CT60NO




Thermostat with a normally closed contact, for use when the temperature reaches the set value. Red coloured control dial. Din rail mounting

General Characteristics

Temperature range	0° to 60° C
Contact	NO
Rated voltage	250V AC / 30V DC
Rated current	10A
Width	32mm
Height	61mm
Depth	37mm
Construction material	ABS
Connection type	Screw
Switching T° tolerance	7K (=4K)
Sensing element	Bimetallic
Terminal Capacity	2.5mm ²
Tightening torque	0.8 Nm
Operating/Storage temperature	-5° to +80° C
Ingress protection	IP20
Weight	45g

Technical Drawing

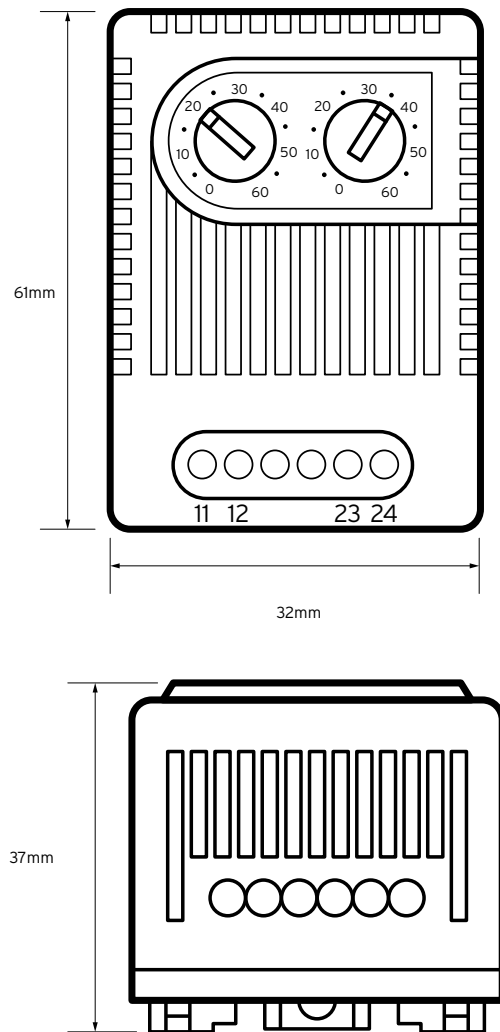

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.