


Domestic Consumer Units (18 Edition)



Technical data GCS8EV40PME


Rated current	40A
Rated voltage	230 V AC
Frequency	50/60 Hz
Rated Conditional Short Circuit (Icc)	Annex ZB: 16kA rms at 250V
Main Device	40A RCBO Type A
Additional Devices	PME Fault detection & Surge
Operation	213V - 253V (4 seconds)
Degree of protection	IP65
Total number of ways	8
Total Number of free ways	0
Height..mm (H)	231
Width..mm (W)	238
Depth..mm (D)	118
Ambient temperature (C)	-25.....+55
Storage temperature (C)	-35.....+55
Terminals	25mm
Material	Metal
Standard	EN 61439-3
	Compliance with BS 7671
Warranty (Mechanical Components)	5 Years
Warranty (Electronic Components)	2 Years

For EV chargers with DC leakage protection

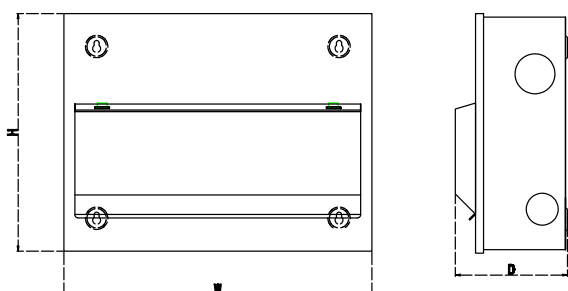


IET BS:7671:2018**722.411.4 TN system (Amendment 1:2020)**

(iv) Protection against electric shock in a single-phase installation is provided by a device which electrically disconnects the vehicle from the live conductors of the supply and from protective earth in accordance with Regulation 543.3.3.101(ii) within 5 s in the event of the utilisation voltage at the charging point, between the line and neutral conductors, being greater than 253 V rms or less than 207 V rms. The device shall provide isolation and be selected in accordance with Table 537.4. Equivalent means of functionality could be included within the charging equipment. Closing or resetting of the device shall be possible only if the voltage between line and neutral conductors is in the range 207 to 253 V rms.



NOTE:

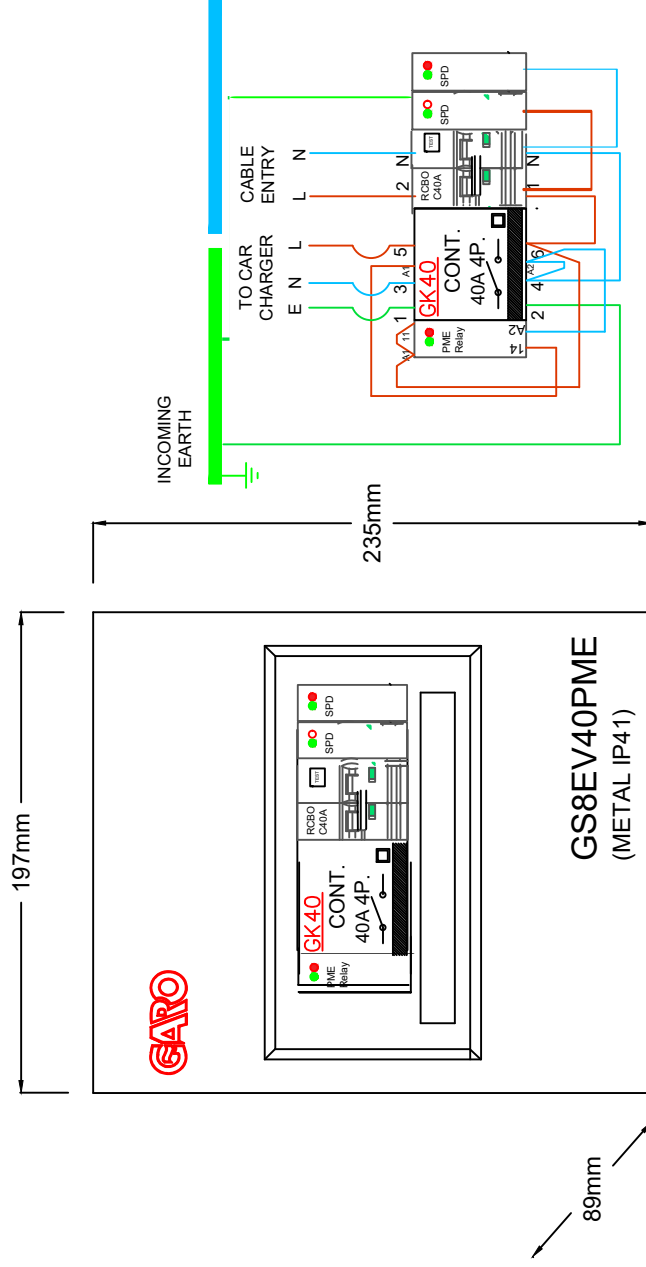INCOMING (RCBO)
TERMINAL 3: PHASE
TERMINAL 1: NEUTRAL
EARTH BAR: EARTHOUTGOING (CONTACTOR)
TERMINAL 1: EARTH
TERMINAL 3: NEUTRAL
TERMINAL 5: PHASE

DRAWING No.		SHEET	
GS8EV40PME		-1	
PROJECT		PROJECT No	
MCU 40Amp With Surge Type A RCBO & PME Fault Detection			
NO	DESCRIPTION	DATE	NAME
			CHECK
			APPD



Supplier/Tillverkare:

*GAROAB
Box 203
S-335 25 GNOSJO
Sweden*

Telephone: +46 (0)370 33 28 00
Telefax: +46 (0)370 33 28 50

Supplier established within EU/Ombud etablerad inom EG

Supplier of equipment /Materielslag : Consumer unit/Normcentral

Trade Mark/ Varumärke: GARO

Type Designation / Typbeteckning: G, GS, 4, 6, 8, 10, 12, 14,16,18, 21, 28, 32, EV, S, R, C, PME.

We hereby declare that our product fulfils the requirements of following EC directives/
Vi intygar härmed att vår produkt uppfyller krav enligt följande EU direktiv:

The following harmonised standards (latest edition) or technical specifications which comply with good engineering practice in safety matters in force within the EU have been used in the design:/
Följande harmoniserade standarder (senaste utgåva) eller tekniska specifikationer som uppfyller god säkerhetsteknik praxis inom EG har använts i konstruktionen: SS EN 6