


# niGLON

## Circuit Protection

# M3CU8SP Isolator Controlled (SPD inc.)



### Technical Drawing

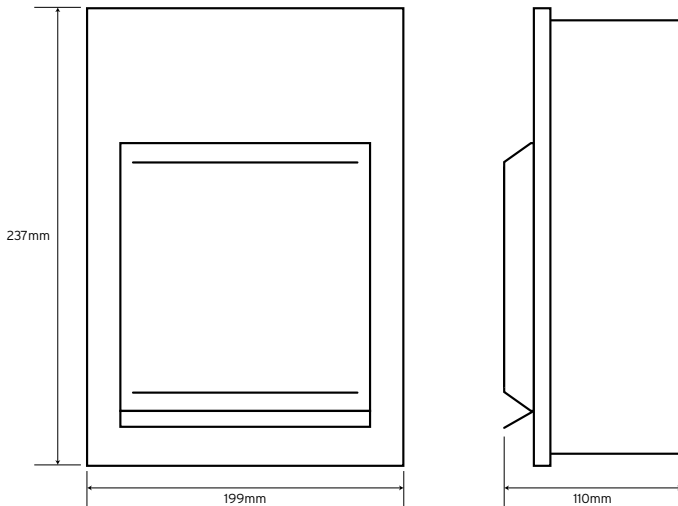

### Technical Specifications

<b>Material Composition</b>	Steel (Powder Coated)
<b>Paint Colour</b>	RAL 9010
<b>Configurations</b>	8 module 4 way 100A DP Isolator + SPD
<b>Rated Operational Voltage (Un/Ue)</b>	230V AC
<b>Rated Current of Assembly (InA)</b>	100A
<b>Rated Frequency</b>	50Hz
<b>Max. Incoming Cable Size</b>	35mm <sup>2</sup>
<b>Surge Protection Device</b>	Type 2 (or 3) 15kA : BS EN 61643-11
<b>Miniature Circuit Breaker (MCB)</b>	Manufactured to BS EN 60898
<b>IK Rating (Impact Protection)</b>	IK05
<b>IP Rating (Ingress Protection)</b>	IP20
<b>Standards</b>	BS7671:2018, BS EN61439-3
<b>Certification</b>	Semko, Kema Keur, CSA, UR, EAC, CE, UKCA, Intertek
<b>Dimensions</b>	199mm W x 237mm H x 110mm D

All specifications are Intertek Certified  
Surge protection device included 15kA I<sub>max</sub>