




NSA2-240

Type 2 Surge Protection Kit - Compact Pluggable c/w neutral & earth links

Technical Specifications

Change to Suitable for Earthing Type	TN-C, TN-C-S, IT & TT
Type	Type 2
Rated Working voltage of U_o	230V
Max. discharge current 8/20 μ s (kA)	(I_{max}) 40kA
Nominal Discharge current 8/20 μ s (kA)	20kA
Max. Continuous operating voltage	(U_c) 275 V~
Voltage protection level (kV)	(U_p) 335 Vac withstand
Supplied with cables	Yes
IP Rating	IP20
Material	PA66
Local indicator	Green indicates normal state and red indicates failure
Flammability Rating	Comply with UL94V-0
Remote Signaller	Yes
Busbar Mounting	Yes
Relevant Standards	BS EN 61643-11

Wiring Diagram

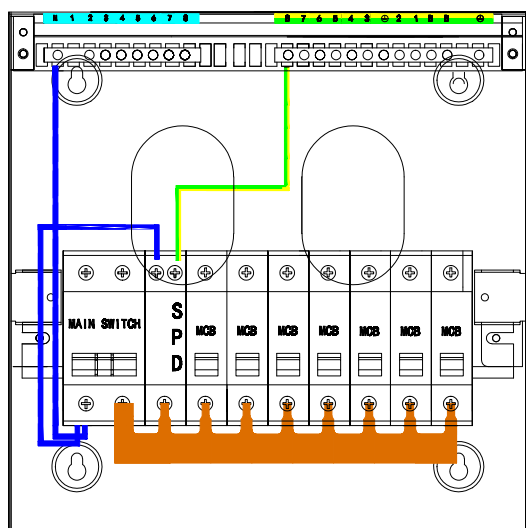

Technical Drawing

