



ALSQ240CCT/WH

3W IP54 CCT LED Square Low Level

TRAFALGAR™


PRODUCT FEATURES

- CCT Selectable (3000K/4000K/6000K)
- IP54 Rated
- Ultra Slim Profile
- Opal Polycarbonate Lens
- Strong Polycarbonate Body
- Ideal For Stair & Plinth Lighting
- Paintable Polar White Finish Bezel
- Screwless Design
- Mains Dimmable
- Fixings Included
- Clip-On Designed Bezels
- Carbon Black & Stainless Steel Bezels Available*

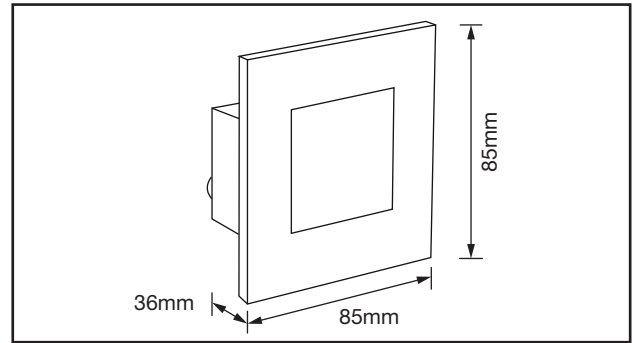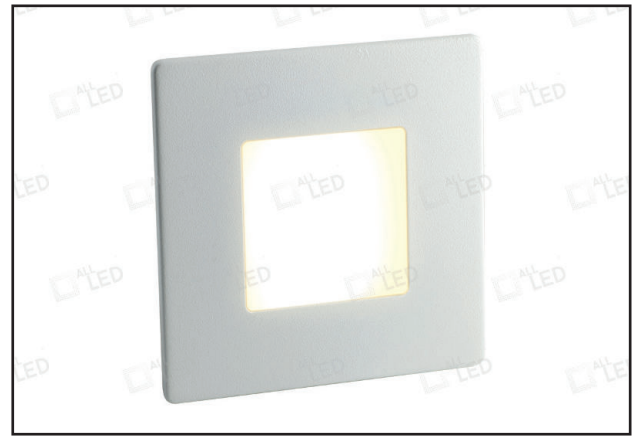


TECHNICAL SPECIFICATIONS

PRODUCT CODE	ALSQ240CCT/WH
Luminous Flux	165lm
Useful Luminous Flux	165lm
CCT	3000K / 4000K / 6000K
Beam Angle	120°
SDCM	<6
CRI	>80
Peak Intensity	49.5cd
Operating Voltage	220-240VAC
Max Output Power	3W
Operating Current	0.015A
Standby Power	0W
Class	II
Body Material	Polycarbonate Body, Powder Coated Polar White Stainless Steel 304 Fascia
Cut Out	75x75 Mm Or 1g Back Box
Frame Colour	Polar White
Switching Cycles	15,000
Ingress Protection	IP54 (Indoor Use Only)
Ambient Operating Temperature	-20°C ~ +40°C
Input Frequency	50-60HZ
Guarantee	2 Years
Dimmable	Yes (V-Pro Recommended)
Input Type	Alternating Current
Lifetime	25,000 Hrs

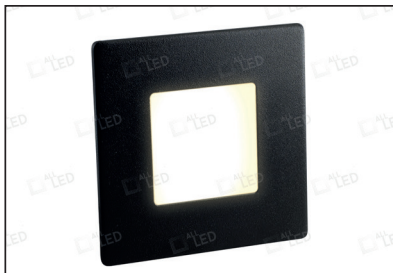

Carbon Black Bezel*
ALSQ240CCTBZ/BLK

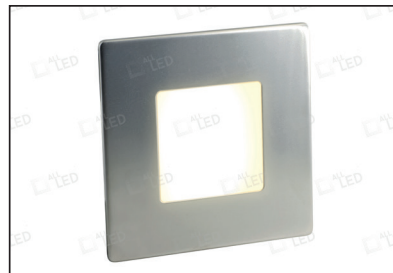

Stainless Steel Bezel*
ALSQ240CCTBZ/SS



*Sold Separately